



Coating head

Specially designed for fluoropolymers

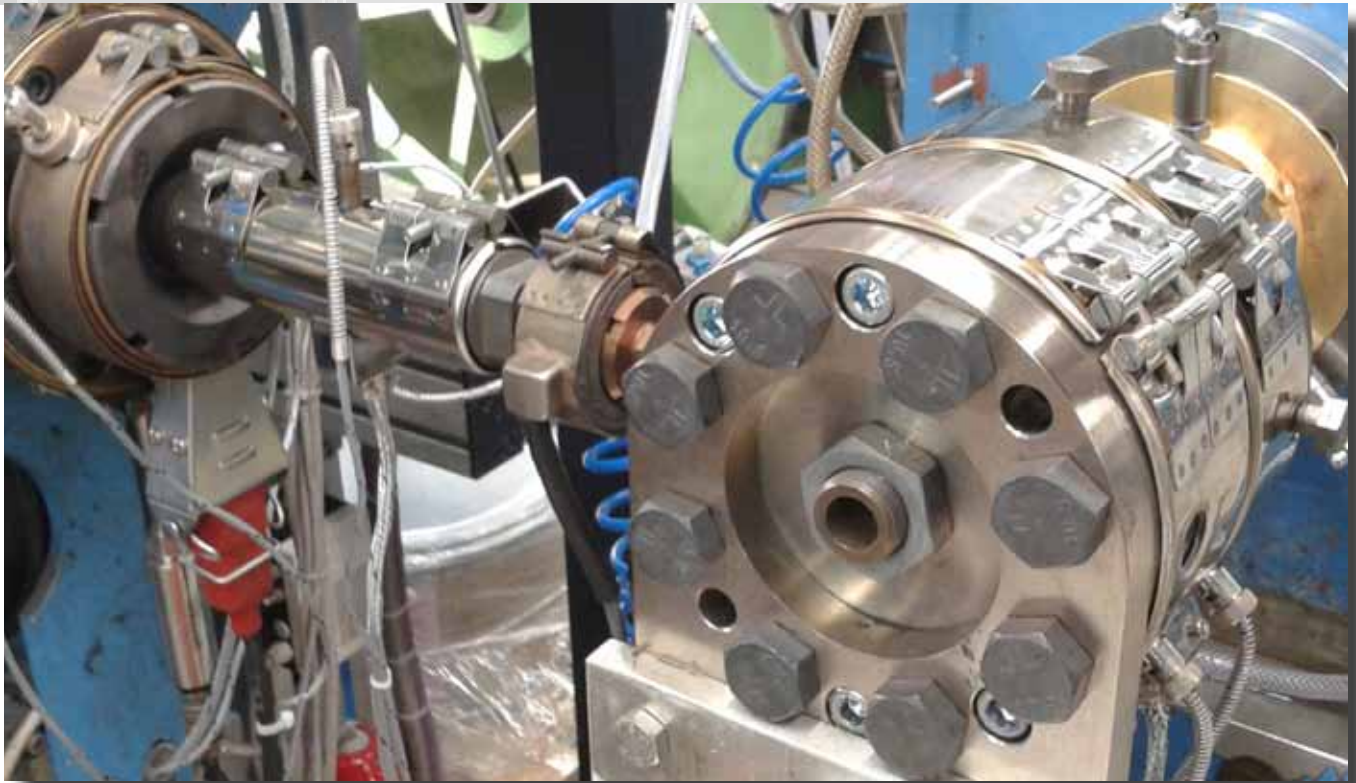

Technical details for the coating head

Up to 2 layers	Identical dimensions in the intermediate and distribution plates enable fast and simple conversion to more or fewer layers.
Modular structure	The base parts can be combined freely and can be installed at any position in the head. Adjustments to different plate variations can be carried out easily .
Compact and space-saving	The diameter is 180 mm. The low proportion of melt contents ensures reduced flushing times .
Easy to clean	The coating head is easy to clean because the melt delivery can be removed completely .
Simple components	All plates are centred by two continuous guide rods and fixed with continuous screws . Simple components and small dimensions make the coating head particularly good value .
Material	Inconel or coated with Lunac

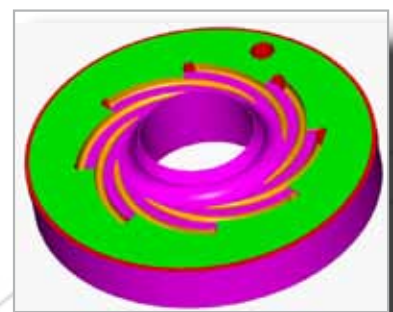

CAD-Model



CFD-Model

Coating head



Specially designed for fluoropolymers

Questionnaire for tender preparation

Fax: +49 67 25 919 25 200

Please fill out your requirements.

Materials (please also include the thickness of the layer and the manufacturer):

Layer 1: _____

Layer 2: _____

Required ejection:

Metres/minute: _____

Required compound:

Further processing:

- | | | |
|---------------------------------|-----------------------------------|------------------------------------|
| <input type="radio"/> Cutter | <input type="radio"/> Winder | <input type="radio"/> Laydown belt |
| <input type="radio"/> Packaging | <input type="radio"/> Buffer line | <input type="radio"/> Palletising |

Your contact details:

Please include a drawing of the product.

Thank you!

